

Advisor Advanced

Integrated security solutions



Plug-on expanders




Wireless components for 868 MHz Gen2



Communication devices



*Only for ATS4500A

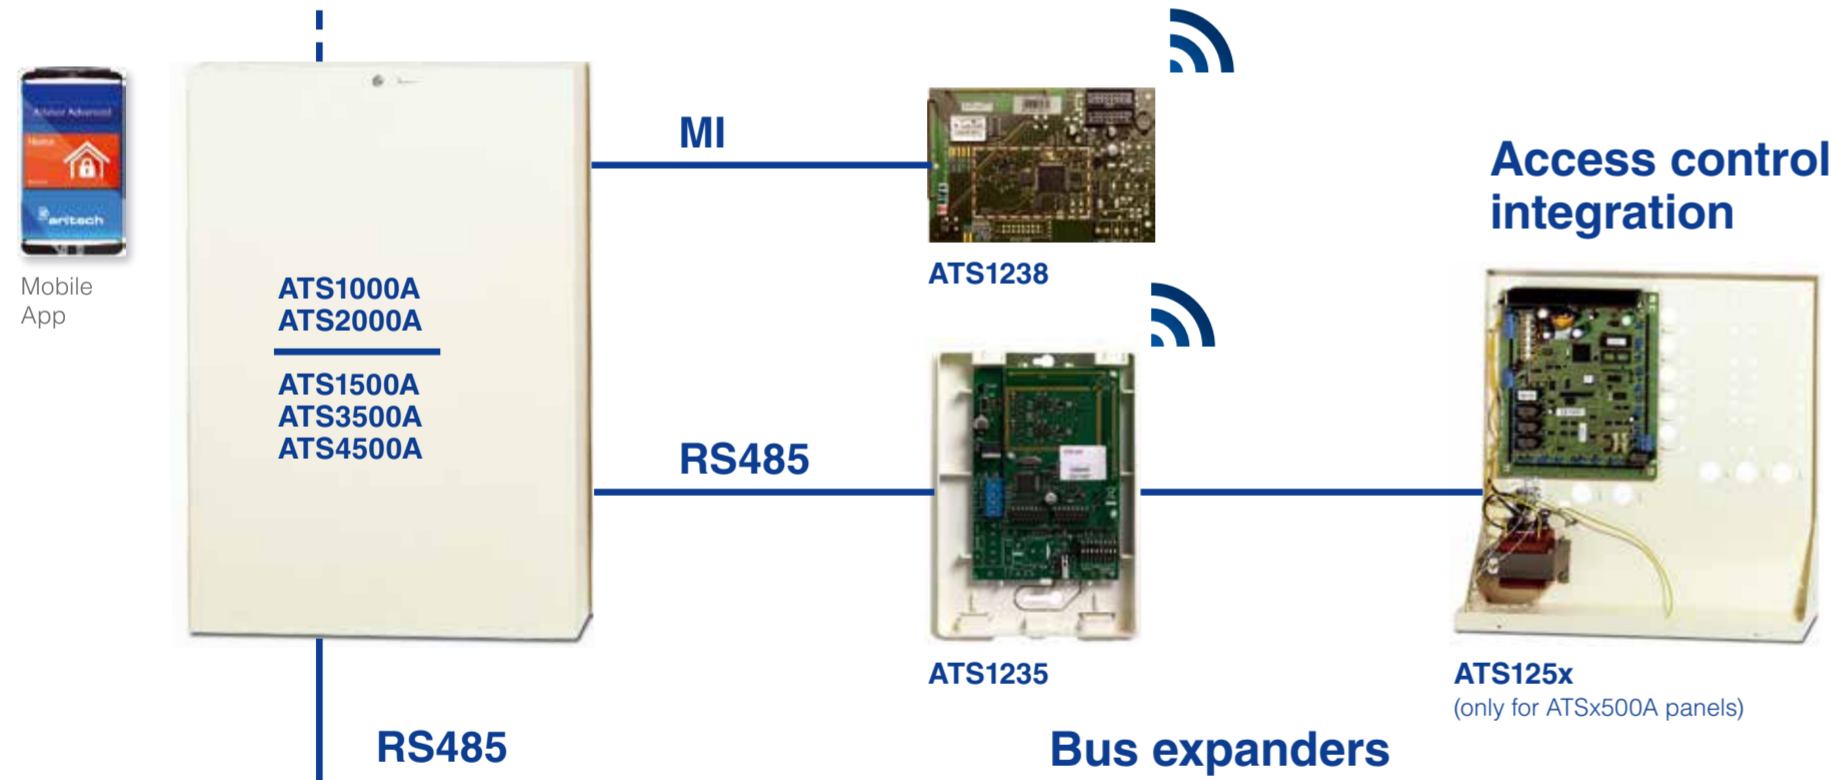

Software

Advisor Configurator
Configuration and remote services



Advisor Management
End user management



Keypads & readers


Model	Description
ATS1110A	Advisor Advanced 16 area keypad, 2x16 char. LCD display
ATS1115A	Advisor Advanced 16 area keypad, 2x16 char. LCD with built-in card reader
ATS1135	Advisor Advanced residential keypad
ATS1151	ATS aluminium keypad with 3 LED
ATS1155	ATS Remote Arming Station (RAS) - 4 LED heavy-duty keypad (supplied in kit)
ATS1156	ATS Aluminium magstripe card reader with keypad, 3 LED
ATS1160N	ATS Mifare DESFire & EV1 reader with output & RTE
ATS1161N	ATS Mifare DESFire & EV1 reader with PIN, output & RTE
ATS1170	Single door controller with offline database for 20 users (connectivity to Wiegand readers)
ATS1190	ATS smart card reader
ATS1192	ATS heavy-duty smart card reader
ATS1197	ATS smart card reader with keypad
ATS7072	The ATS7072 offers the possibility to install the ATS1238 outside the housing of the panel

Expanders and accessories

Model	Description
ATS608	8-way input expander, plug-in, Advisor Advanced
ATS624	4 relay output expander, plug-in
ATS626	16-way output expander, plug-in, Advisor Advanced
ATS670	Second RS485 LAN extension module for ATSx500A
ATS1201(E)	ATS 8 - 32 zone DGP with power supply and siren driver
ATS1202	ATS plug-in 8-zone expander
ATS1203(E)	ATS 8 - 32 zone DGP with 3 A power supply and siren driver
ATS1210	ATS 8-zone DGP with output connector in plastic housing
ATS1210LE	8 - 16 zone DGP expander, no PSU in large plastic enclosure
ATS1211(E)	ATS 8-zone DGP with output connector in steel housing
ATS1220	ATS 4-zone DGP with output connector in plastic housing
ATS1226	ATS intelligent door DGP for Advisor Advanced control panel series
ATS1235	ATS advanced wireless DGP on 868 MHz Gen2
ATS1238	Wireless DGP supporting 868 MHz Gen2 sensors and PIRcam
ATS1740	ATS RS485 isolator/repeater
ATS1742	ATS RS485 closed loop module
ATS1744	ATS RS485 4-way databus isolator
ATS1810	ATS 4-way relay card
ATS1811	ATS 8-way clocked relay card (DGP only)
ATS7120	ATS ISDN - B channel communicator
ATS7200N	ATS voice reporting module
ATS7310	GSM module for reporting and U/D
ATS7700	PSTN plug-on module for ATSx500A
ATS125x	Series of ATS intelligent 4 door DGP with power supply (1-5) - only for ATSx500A, not for ATSx000A
ATS7090	Interface board for WebWayOne alarm communicator
TDA74xxNG	Chiron - GPRS/Ethernet alarm communicator
TDA7500	Safetel - GPRS alarm communicator

Wireless components 868 MHz Gen2

Model	Description
TX-1011-03-1	Slimline door/window contact, 868 MHz Gen2, white
TX-1011-03-3	Slimline door/window contact, 868 MHz Gen2, brown
TX-1211-03-1	Universal transmitter, 868 MHz Gen2, white
TX-1211-03-3	Universal transmitter, 868 MHz Gen2, brown
TX-2211-03-1	Mirror motion sensor, 868 MHz Gen2
TX-2212-03-1	Mirror motion sensor (pet immune), 868 MHz Gen2
TX-2411-03-1	Dual motion sensor, 868 MHz Gen2
TX-3011-03-1	Dual button panic pendant, 868 MHz Gen2
TX-4131-03-2	4 button keyfob, 868 MHz Gen2
TX-5011-03-1	Shock sensor 868 MHz Gen2, white
TX-5011-03-3	Shock sensor 868 MHz Gen2, brown
TX-6212-03-1	Optical smoke detector, 868 MHz Gen2
TX-9000-03-1	Empty housing for ATS1235
TX-9001-03-1	Smart repeater 868 MHz Gen2
TX-2344-03-1-N	Wireless mirror VE PIRcam
TX-2810-03-4	Wireless outdoor PIR 868AM Gen2
TX-2821-03-4	Wireless mini outdoor PIR 868AM Gen2

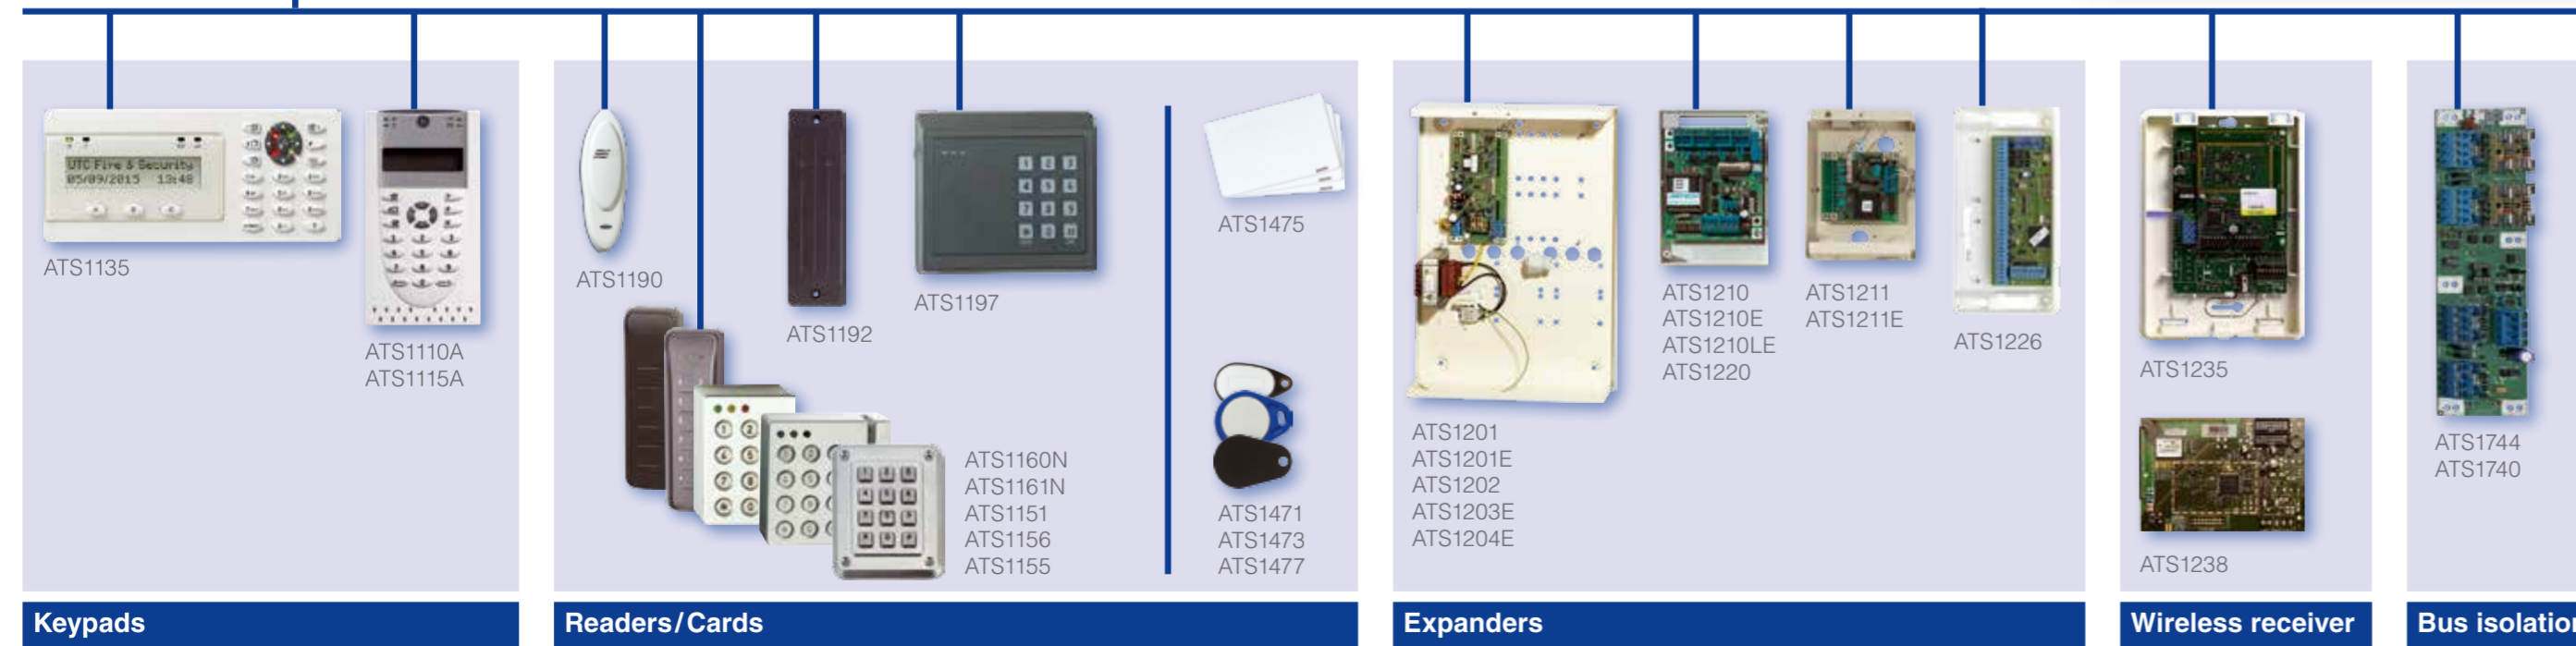

Products

	ATSx500A platform			ATSx000A platform	
	ATS1500A (IP)	ATS3500A (IP)	ATS4500A (IP)	ATS1000A (IP)	ATS2000A (IP)
Approval/Grade - EN50131	EN2/EN3	EN3	EN3	EN2	EN2
Housing	SM - MM - LP	MM - LP	MM - LM	SM - MM - LP	MM
Zones on board - Wired	8	8	8	8	8
Zones plug on expander on panel PCB	8	8	8	8	8
Max wired zones/wireless	32/32	128/128	512/512	32/32	64/64
Areas	4	8	64	4	8
Users PIN/cards	50	200	1000	50	50
User groups	16	64	128	16	16
Event log	4x1000+2x1500	4x1000+2x1500	4x1000+2x1500	4x250	4x250
Max keypads/readers	8	16	32	8	8
Max I/O module on Bus	7	15	30	7	7
Standard doors	4	8	16		
ATS125x doors	28	48	48		
Regions	256	256	256		
Door groups	128	128	128		
Access events	10.000	10.000	10.000		

*EN Grade 3 certification for ATSx500A series